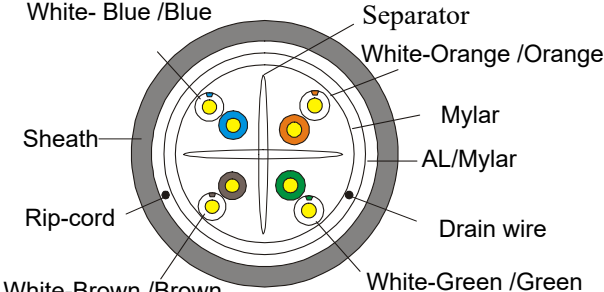


F/UTP 4Pairs cable-category6A-FR LSZH Sheath

P/N: LG2502-034

Content of the Data Sheet

Sheath Printing	TBD								
Customer No.		Customer Reference							
Category	F/UTP CAT6A-4P-LSZH(B2ca)								
Reference Standard	ISO/IEC11801 、TIA-568-C.2								
Conductor	Material	SOLID-Bare Copper							
	Nom.O.D.(mm)	0.565	up	+0.01					
			down	-0.01					
Insulation 1	Material	PE							
	Diameter	1.10±0.08mm							
Insulation 2	Material	PE							
	Diameter	1.20±0.08 mm							
Filling	Plastic Separator : FRPE								
Screening Material	Mylar+ AL/Mylar								
Sheath	Thickness	0.65±0.05mm			Technical Performance (100m) :				
	External O.D.	7.5±0.4mm			Frequency (MHz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	PHASE DELAY ≤ns
	Surface	Clean, Frap, Satiation			1	20.0	—	74.3	570.0
	Material	FR-LSZH(complies RoHS)			4.0	23.0	3.8	65.3	552.0
	Color	TBD			8.0	24.5	5.3	60.8	546.7
Surface Printing	Letter height	3.0±0.3mm			10.0	25.0	5.9	59.3	545.4
	Color	Black			16.0	25.0	7.5	56.2	543.0
	Print error & Space	≤±0.5%, 1m			20.0	25.0	8.4	54.8	542.1
					25.0	24.3	9.4	53.3	541.2
Core Color	1 White- Blue /Blue		2 White-Orange /Orange		31.25	23.6	10.5	51.9	540.4
	3 White- Green /Green		4 White- Brown /Brown		62.5	21.5	15.0	47.4	538.6
Packing	Drum				100	20.1	19.1	44.3	537.6
Wooden Tray dimension	According to the requires				200	18.0	27.6	39.8	536.5
Packing length	305±1.5m				250	17.3	31.1	38.3	536.3
Rip-cord	Yes	Drain wire	Yes		300	16.8	34.3	37.1	536.1
Sheath Physical Properties	Before Aging	Tensile Strength (Mpa)		≥9.0	500	15.2	45.3	33.8	535.6
		Elongation (%)		≥100					
	Aging Period (℃×hrs)		100℃×24h×7d						
	After Aging	Tensile Strength (Mpa)		≥8.0					
		Elongation (%)		≥70					
Electrical Characteristics (20℃)	Cold bend (-20±2℃×4h)		15times cable O.D. No visible cracks						
	Impedance(Ω)	1.0-250.0MHz	100±15						
		250.0-500.0MHz	100±22						
	1.0-500.0MHz	Delay Skew (ns/100m)		≤45					
	Unbalanced-to-ground capacitance (pf/100m) max		330						
	DC Resistance (Ω/100m) max		9.38						
	DC Conductor Resistance Unbalance (%) max		5.0						
Reaction to fire Classification: B2ca,s1,d1,a1									
Version	A/03	Date	2024-01-09	Revised By	Caihanglie	Audited By	Nidonghua	Approved By	Nidonghua

Number	Revise Contents	Revise Reasons	Revised By	Audited By	Approved By	Date
A/01	Specification Version 1		Caihanglie	Nidonghua	Nidonghua	2017-08-25
A/02	Specification Version 2		Caihanglie	Nidonghua	Nidonghua	2023-05-24
A/03	Specification Version 3		Caihanglie	Nidonghua	Nidonghua	2024-01-09