

LPJMAA31-M(L)xxC

SFP28 25Gb/s Active Optical Cable DDM

PRODUCT FEATURES

- Up to 25.7813Gb/s Data Links
- 850nm VCSEL laser transmitter and PIN/TIA receiver
- Maximum link length of 100m on OM4 MMF
- Hot-pluggable SFP+ footprint
- Power consumption less than 1W
- RoHS compliant and lead-free
- Support Digital Diagnostic Monitor interface
- +3.3V Single power supply
- Case operating temperature Commercial: 0°C to +70°C



APPLICATIONS

- 25GBASE-SR Ethernet

Compliance


- SFP+ MSA.
- SFP+ SFF-8431 and SFF-8432.
- RoHS

Ordering information

Package	Product part NO.	Distance	Temperature Range
SFP28	LPJMAA31-L03C	0.3-metercable	Commercial:0~70°C
SFP28	LPJMAA31-M01C	1-metercable	Commercial:0~70°C
SFP28	LPJMAA31-M03C	3-metercable	Commercial: 0~70°C
SFP28	LPJMAA31-M05C	5-metercable	Commercial: 0~70°C
SFP28	LPJMAA31-M06C	6-metercable	Commercial: 0~70°C
SFP28	LPJMAA31-M10C	10-metercable	Commercial: 0~70°C
SFP28	LPJMAA31-M15C	15-metercable	Commercial: 0~70°C
SFP28	LPJMAA31-M20C	20-metercable	Commercial: 0~70°C
SFP28	LPJMAA31-M25C	25-metercable	Commercial: 0~70°C
SFP28	LPJMAA31-M30C	30-metercable	Commercial: 0~70°C
SFP28	LPJMAA31-M50C	50-metercable	Commercial: 0~70°C
SFP28	LPJMAA31-S10C	100-metercable	Commercial: 0~70°C

*For availability of additional cable lengths, please contact Oubochao

I. Pin Diagram

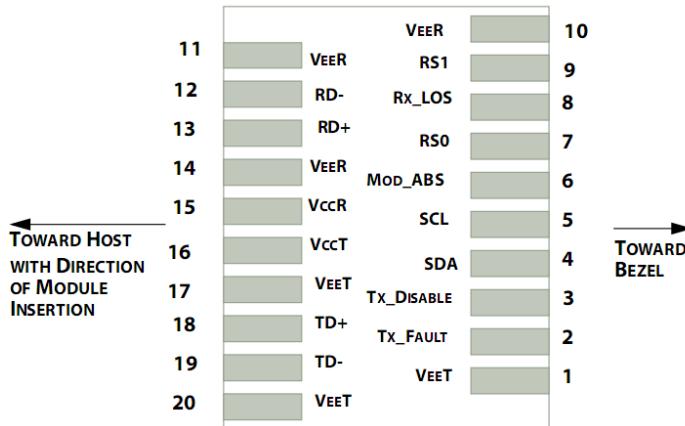

Pin out of Connector Block on Host Board

II. Pin Descriptions

Pin	Symbol	Name/Description	Ref.
1	V _{EET}	Transmitter Ground (Common with Receiver Ground)	1
2	T _{FAULT}	Transmitter Fault.	2
3	T _{DIS}	Transmitter Disable. Laser output disabled on high or open.	3
4	SDA	2-wire Serial Interface Data Line	4
5	SCL	2-wire Serial Interface Clock Line	4

6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	No connection required	
8	LOS	Loss of Signal indication. Logic "0" indicates normal operation.	5
9	RS1	No connection required	
10	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
11	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
15	V_{CCR}	Receiver Power Supply	
16	V_{CCT}	Transmitter Power Supply	
17	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1

Notes:

1. Circuit ground is internally isolated from chassis ground.
2. TFAULT is an open collector/drain output, which is pulled up with a $4.7\text{k}\Omega - 10\text{k}\Omega$ resistor on the host board, but is grounded inside the SFP+ cable plug.
3. Laser output disabled on TDIS $> 2.0\text{V}$ or open, enabled on TDIS $< 0.8\text{V}$.
4. Should be pulled up with $4.7\text{k}\Omega - 10\text{k}\Omega$ on host board to a voltage between 2.0V and 3.6V .
- MOD_ABS pulls line low to indicate module is plugged in.
5. LOS is open collector output. Should be pulled up with $4.7\text{k}\Omega - 10\text{k}\Omega$ on host board to a voltage between 2.0V and 3.6V . Logic 0 indicates normal operation; logic 1 indicates loss of signal.

III. Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Ref.
Maximum Supply Voltage	Vcc	-0.5		3.6	V	
Storage Temperature	T _s	-40		85	°C	1
Case Operating Temperature	T _{OP}	0		70	°C	
Relative Humidity	RH	0		85	%	2

Notes:

1. Limited by the fiber cable jacket, not the active ends.
2. Non-condensing.


IV. Electrical Characteristics (TOP = 0 to 70°C, VCC = 3.3 ± 5% Volts)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Ref.
Supply Voltage	Vcc	3.15		3.45	V	
Supply Current	Icc			300	mA	
Transmitter						
Input differential impedance	Rin		100		Ω	1
Differential data input swing	Vin,pp	200		1000	mV	
Transmit Disable Voltage	V _D	2		V _{cc}	V	
Transmit Enable Voltage	V _{EN}	Vee		Vee+0.8	V	
Receiver						
Differential data output swing	Vout,pp	200		1000	mV	2
LOS Fault	V _{LOS_fault}	2		VccHOST	V	3
LOS Normal	V _{LOS_norm}	Vee		Vee+0.8	V	3
Power Supply Noise Tolerance	V _{CCT} /V _{CCR}	Per SFF-8431 Rev 4.1			mVpp	4

Notes:

- 1.Connected directly to TX data input pins.AC coupling from pins into laser driver IC.
- 2.Into 100Ω differential termination.
- 3.20-80%.Measured with Module Compliance Test Board and OMA test pattern. Use of four 1's and four 0's in sequence in the PRBS^9 is an acceptable alternative. SFF-8431 Rev 4.1
4. LOS is an open collector output. Should be pulled up with 4.7kΩ – 10kΩ on the host board.
- Normal operation is logic 0; loss of signal is logic 1. Maximum pull-up voltage is 5.5V.
5. Testing methodology per SFF-8431. Rev 4.1


V. Digital Diagnostic Memory Map

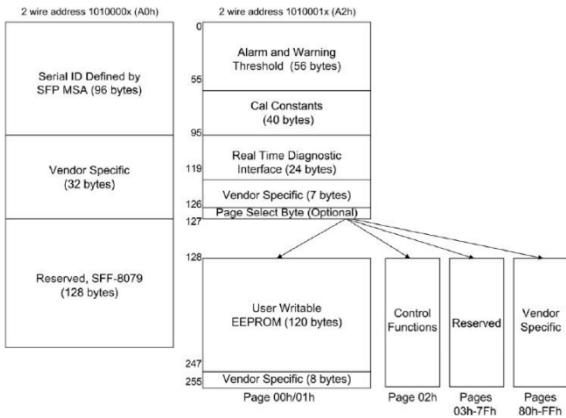


VI. Digital Diagnostic Monitoring Information

Parameter	Unit	Accuracy
Case Temperature	°C	±3
Supply Voltage	V	±3%
Tx Bias Current	mA	±10%
Tx Optical Power	dB	±3
Rx Optical Power	dB	±3

VII. Recommended Interface Circuit

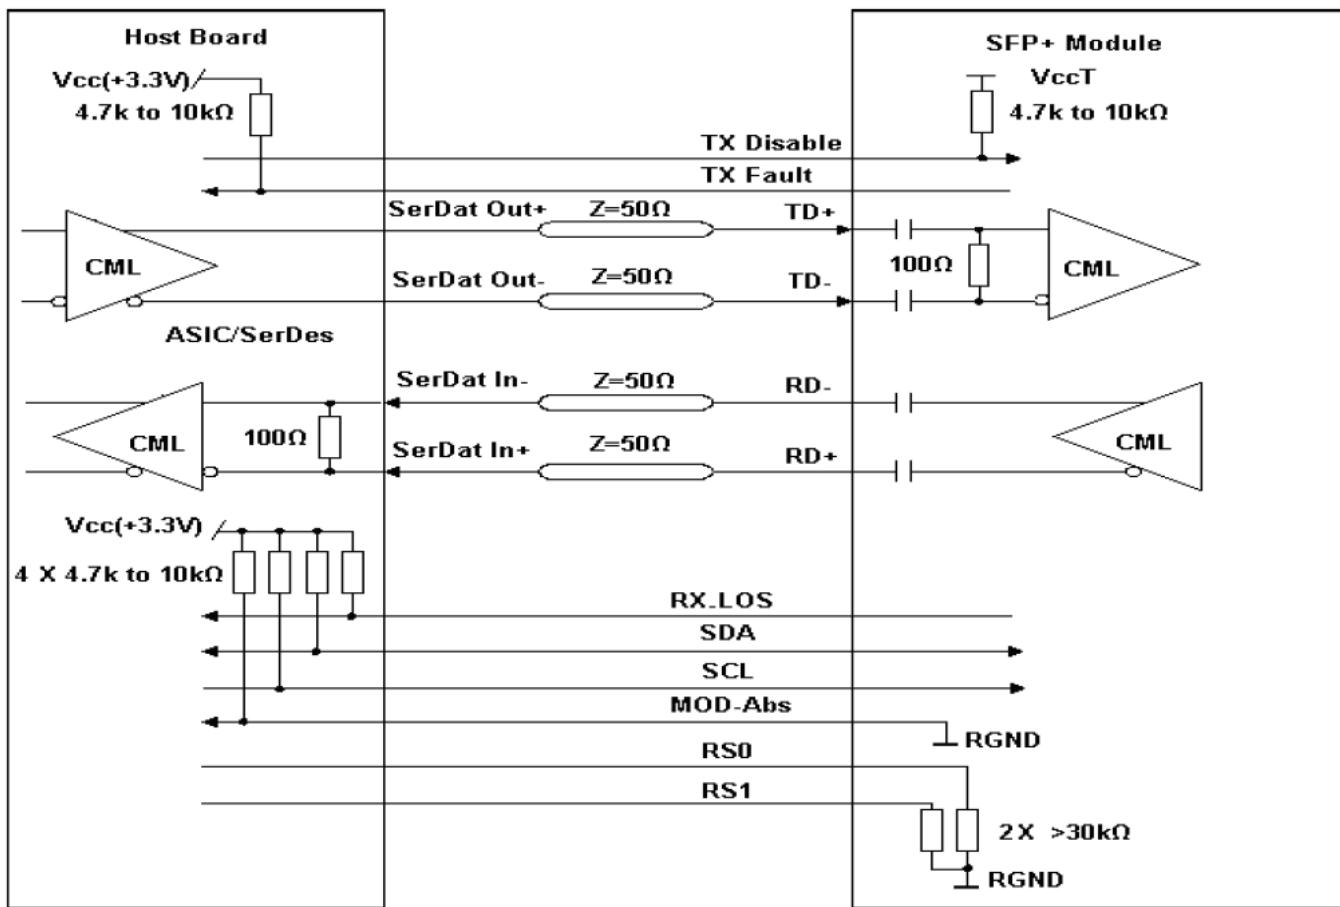

VIII. Mechanical Dimensions

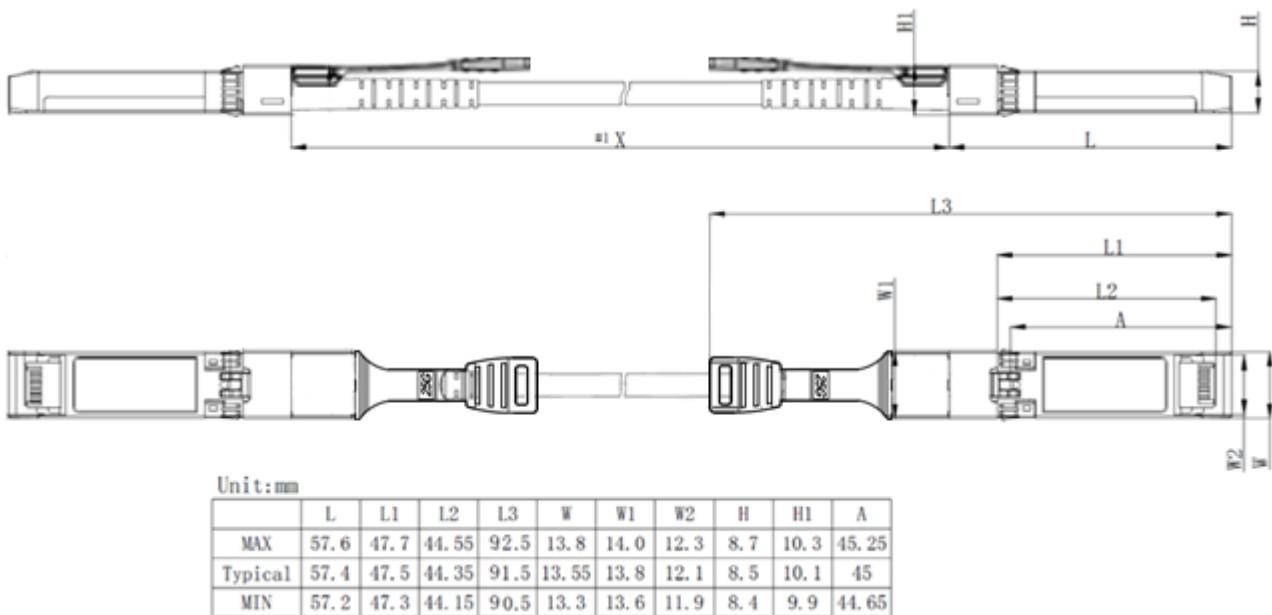

SFP wire mechanical drawing(Unit: mm)