


Standard Open Rack

Part Number: LPROXXXXXXXX



Single Rack

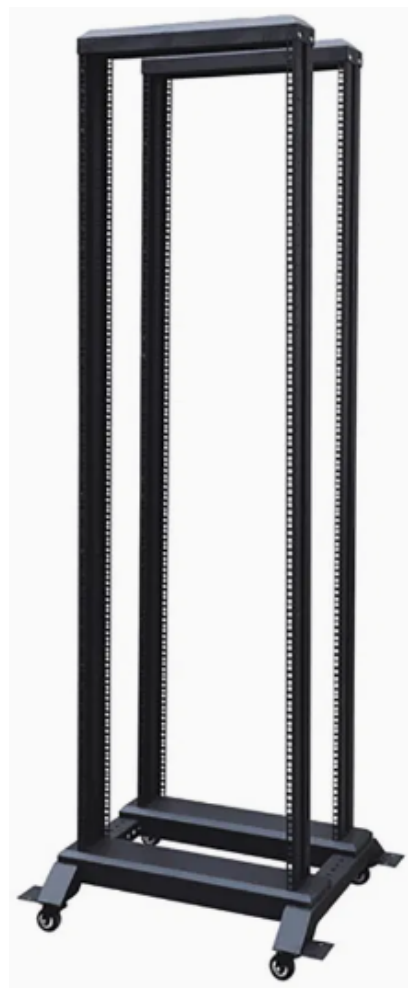

Dual Rack

Product Description

Open rack is standard 19-inch rackmount design to mount networking equipment in limited spaces. It does not have doors or side panels, providing easy access to the equipment from all sides and unobstructed airflow.

Open racks are a versatile and practical solution for many IT and data center applications, offering a balance of accessibility and cost-effectiveness.

Feature & Benefit

■ 19-Inch Standard structure design

Height: Available for 22U,32U, 37U,42U and 47U
Width: 600mm,
Depth: 600mm

■ Maximum capacity

Static load: Single frame Max.150KG
 Dual frame Max.400KG

■ Easy equipment mounting

Easy access to the front, back, and sides
Rails can be adjusted to accommodate different sizes

■ Cable Management Systems

Easy to install vertical and horizontal cable management

■ Ready for deployment

Casters: Enables easy movement and repositioning
Leveling Feet: Stabilizes the rack on uneven surfaces (only on dual rack)

■ Accessory

Tray: Standard Configuration Includes 2 Units
Cable Manager: Horizontal Cable Manager / Vertical Cable Manager
 (option)

■ Package for deliver


Bulk Parts package

■ Compatibility with Industry Standards

ANSI/TIA-942
ANSI/EIA RS-310-E
DIN41494:PART7
GB/T 3047.2-92


Product outline

Single rack

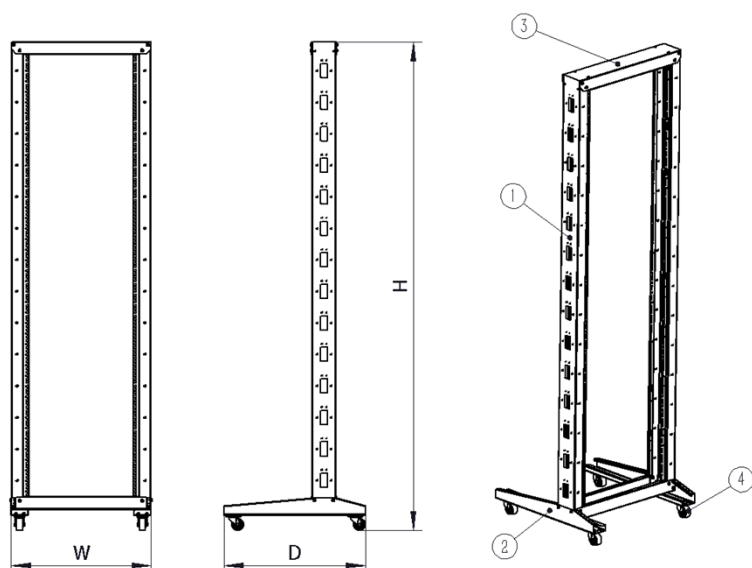

Item	Part	Qty
1	Frame	2
2	Bottom	2
3	Beam	2
4	Caster	4

Dual rack

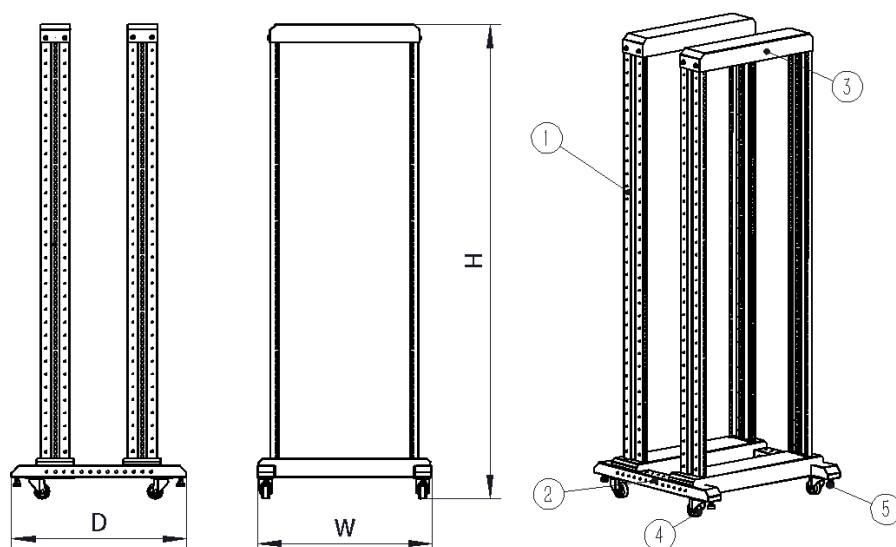

Item	Part	Qty
1	Frame	2
2	Bottom	2
3	Top	2
4	Caster	4
5	Leveling Feet	4

Specifications

Model	Structure	Height(H)	Width(W)	Depth(I)	Weight	Static Load
22HU	Single	1120mm	600mm	600mm	17kg	150kg
	Dual	1120mm	600mm	600mm	31 kg	400kg
32HU	Single	1562mm	600mm	600mm	19kg	150kg
	Dual	1562mm	600mm	600mm	37 kg	400kg
37HU	Single	1785mm	600mm	600mm	21kg	150kg
	Dual	1785mm	600mm	600mm	39 kg	400kg
42HU	Single	2010mm	600mm	600mm	23kg	150kg
	Dual	2010mm	600mm	600mm	41 kg	400kg
47HU	Single	2230mm	600mm	600mm	25 kg	150kg
	Dual	2230mm	600mm	600mm	43 kg	400kg

Environmental Temperature

Item	Value
Operation temperature range	-5°C to +60 °C
Storage temperature range	-20°C to +60°C
RoHS 2011/65/EU	compliant

Ordering information

LPROXX300-1XX-X-X

1

2

3

4

5

6

7

8

1

Height
22: 22U
32: 32U
37: 37U
42: 42U
47: 47U

2

Width and Depth
3: 600x600, mm

3

Front Door (Single)
0: Null

4

Rear Door
0: Null

5

Material
1: SPCC

6

Color
BK: Black (RAL9005)
WH: White (RAL7032)

7

Package
1: Bulk Parts

8

Frame type
S: Single frame
D: Dual frame

Draft	Check	Approve	Date	Rev.	ECN	Name	Date
				01			