

## LPGCLF31-K10(20)C(I)

SFP 1.25Gb/s 1310nm 10(20)km DDM1

### PRODUCT FEATURES

- Up to 1.25Gbps Data Links
- 1310nm FP laser transmitter and PIN/TIA receiver
- Maximum link length of 20km on 9/125um SMF
- Hot-pluggable SFP footprint
- Duplex LC receptacles
- Low power dissipation
- RoHS compliant and lead-free
- Support Digital Diagnostic Monitor interface
- Single +3.3V power supply
- Compliant with SFF-8472
- Case operating temperature

Commercial: 0°C to +70°C

Industrial: -40°C to +85°C



### APPLICATIONS

- 1000BASE-LX Ethernet
- 1.06Gb/s Fibre Channel


### Compliance

- SFP MSA
- SFF-8472
- IEEE802.3z
- ROHS

## Ordering information

| Part No.          | Bit Rate (Gbps) | Laser (nm) | Distance (km) | Fiber Type | DDMI | Connector | Temp       |
|-------------------|-----------------|------------|---------------|------------|------|-----------|------------|
| LPGCLF31-K10(20)C | 1.25            | 1310       | 10(20)        | SMF        | YES  | LC        | 0°C~70°C   |
| LPGCLF31-K10(20)I | 1.25            | 1310       | 10(20)        | SMF        | YES  | LC        | -40°C~85°C |

### I. Pin Diagram

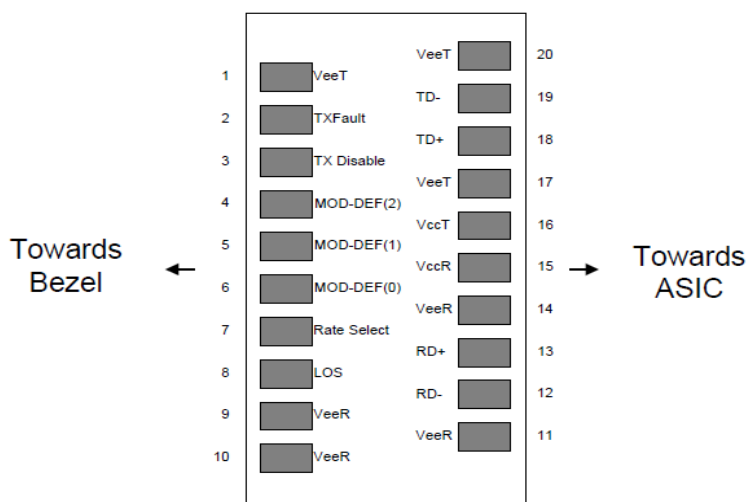

Pinout of Connector Block on Host Board

### II. Pin Descriptions

| Pin | Symbol      | Name/Description                                                 | Ref. |
|-----|-------------|------------------------------------------------------------------|------|
| 1   | $V_{EET}$   | Transmitter Ground (Common with Receiver Ground)                 | 1    |
| 2   | $T_{FAULT}$ | Transmitter Fault.                                               | 2    |
| 3   | $T_{DIS}$   | Transmitter Disable. Laser output disabled on high or open.      | 3    |
| 4   | MOD_DEF(2)  | Module Definition 2. Data line for Serial ID.                    | 4    |
| 5   | MOD_DEF(1)  | Module Definition 1. Clock line for Serial ID.                   | 4    |
| 6   | MOD_DEF(0)  | Module Definition 0. Grounded within the module.                 | 4    |
| 7   | Rate Select | No connection required                                           |      |
| 8   | LOS         | Loss of Signal indication. Logic "0" indicates normal operation. | 5    |
| 9   | $V_{EER}$   | Receiver Ground (Common with Transmitter Ground)                 |      |
| 10  | $V_{EER}$   | Receiver Ground (Common with Transmitter Ground)                 | 1    |

|    |                  |                                                  |   |
|----|------------------|--------------------------------------------------|---|
| 11 | V <sub>EER</sub> | Receiver Ground (Common with Transmitter Ground) | 1 |
| 12 | RD-              | Receiver Inverted DATA out (CML). AC Coupled     |   |
| 13 | RD+              | Receiver Non-inverted DATA out (CML). AC Coupled |   |
| 14 | V <sub>EER</sub> | Receiver Ground (Common with Transmitter Ground) | 1 |
| 15 | V <sub>CCR</sub> | Receiver Power Supply                            |   |
| 16 | V <sub>CCT</sub> | Transmitter Power Supply                         |   |
| 17 | V <sub>EET</sub> | Transmitter Ground (Common with Receiver Ground) | 1 |
| 18 | TD+              | Transmitter Non-Inverted DATA in. AC Coupled.    |   |
| 19 | TD-              | Transmitter Inverted DATA in. AC Coupled.        |   |
| 20 | V <sub>EET</sub> | Transmitter Ground (Common with Receiver Ground) | 1 |

## Notes:

1. Circuit ground is internally isolated from chassis ground.
2. T<sub>FAULT</sub> is an open collector/drain output, which is pulled up with a 4.7kΩ – 10kΩ resistor on the host board, but is grounded inside the SFP cable plug.
3. Laser output disabled on T<sub>DIS</sub> >2.0V or open, enabled on T<sub>DIS</sub> <0.8V.
4. Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10KΩ resistor on the host board. The pull-up voltage shall be V<sub>ccT</sub> or V<sub>ccR</sub>  
 Mod-Def 0 is grounded by the module to indicate that the module is present  
 Mod-Def 1 is the clock line of two wire serial interface for serial ID  
 Mod-Def 2 is the data line of two wire serial interface for serial ID
5. LOS is open collector output. Should be pulled up with 4.7kΩ – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## III. Absolute Maximum Ratings

| Parameter                  | Symbol          | Min  | Type | Max | Unit | Ref.       |
|----------------------------|-----------------|------|------|-----|------|------------|
| Maximum Supply Voltage     | V <sub>cc</sub> | -0.5 |      | 3.6 | V    |            |
| Storage Temperature        | T <sub>S</sub>  | -40  |      | 85  | °C   |            |
| Case Operating Temperature | T <sub>OP</sub> | 0    |      | 70  | °C   | Commercial |
|                            |                 | -40  |      | 85  |      | Industrial |
| Relative Humidity          | RH              | 0    |      | 85  | %    | 1          |

Notes:

1. Non-condensing.

## IV. Optical Characteristics (TOP = 0°C to 70°C, VCC = 3.3 ± 5% Volts)

| Parameter                           | Symbol      | Min. | Typ. | Max. | Unit | Remark |
|-------------------------------------|-------------|------|------|------|------|--------|
| <b>Transmitter</b>                  |             |      |      |      |      |        |
| Center Wavelength                   | $\lambda_c$ | 1280 | 1310 | 1340 | nm   |        |
| RMS Spectral Width                  | Pm          |      |      | 3    | nm   |        |
| Average Output Power                | Pavg        | -9   |      | -3   | dBm  |        |
| Extinction Ratio                    | ER          | 9    |      |      | dB   |        |
| Return Loss                         |             | 12   |      |      | dB   |        |
| Transmitter OFF Output Power        | POff        |      |      | -30  | dBm  |        |
| <b>Receiver</b>                     |             |      |      |      |      |        |
| Center Wavelength                   | $\lambda_c$ | 1260 |      | 1600 | nm   |        |
| Receiver Sensitivity, Average Power |             |      |      | -19  | dBm  |        |
| Receiver Optical Overload           | Psat        |      |      | -3   | dBm  |        |
| Loss of Signal Assert               | PA          | -35  |      |      | dBm  |        |
| Loss of Signal De-assert            | PD          |      |      | -20  | dBm  |        |
| LOS Hysteresis                      | PD- PA      | 0.5  |      |      | dB   |        |

## V. Electrical Characteristics (TOP = 0°C to 70°C, VCC = 3.3 ± 5% Volts)


| Parameter                      | Symbol   | Min   | Type | Max     | Unit | Ref. |
|--------------------------------|----------|-------|------|---------|------|------|
| Supply Voltage                 | Vcc      | 3.135 | 3.3  | 3.465   | V    |      |
| Supply Current                 | Icc      |       |      | 300     | mA   |      |
| <b>Transmitter</b>             |          |       |      |         |      |      |
| Input differential impedance   | Rin      |       | 100  |         |      | 1    |
| Differential data input swing  | Vin, pp  | 200   |      | 1000    | mV   |      |
| Transmit Disable Voltage       | VD       | 2     |      | VCC     | V    |      |
| Transmit Enable Voltage        | VEN      | Vee   |      | Vee+0.8 | V    |      |
| <b>Receiver</b>                |          |       |      |         |      |      |
| Differential data output swing | Vout, pp | 200   |      | 1000    | mV   | 2    |

|                              |                                    |                      |  |                      |      |   |
|------------------------------|------------------------------------|----------------------|--|----------------------|------|---|
| LOS Fault                    | V <sub>LOS_fault</sub>             | 2                    |  | V <sub>cc</sub>      | V    | 3 |
| LOS Normal                   | V <sub>LOS_norm</sub>              | V <sub>ee</sub>      |  | V <sub>ee</sub> +0.8 | V    | 3 |
| Power Supply Noise Tolerance | V <sub>CCT</sub> /V <sub>CCR</sub> | Per SFF-8431 Rev 4.1 |  |                      | mVpp | 4 |

Notes:

1. Connected directly to TX data input pins.AC coupling from pins into laser driver IC.
2. Into 100Ω differential termination.
3. Loss Of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.


## VI. Digital Diagnostic Memory Map

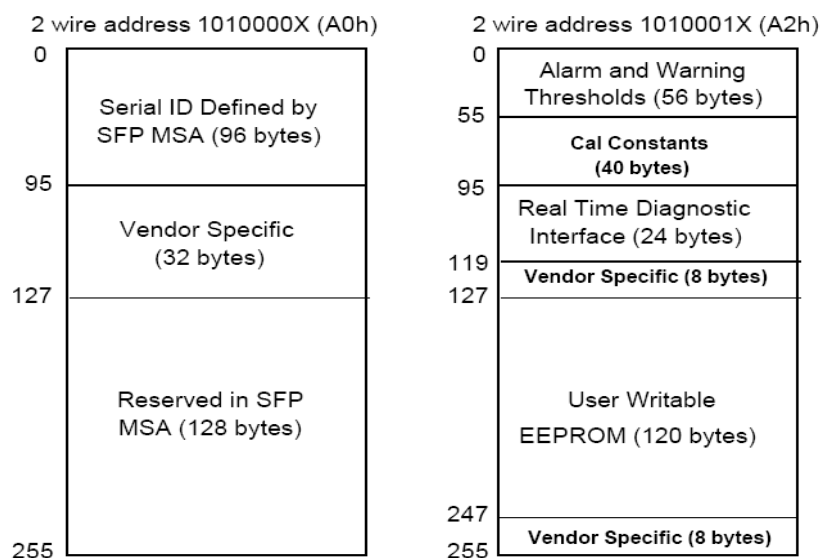


## VII. Digital Diagnostic Monitoring Information

| Parameter        | Unit | Accuracy |
|------------------|------|----------|
| Case Temperature | °C   | ±3       |
| Supply Voltage   | V    | ±3%      |
| Tx Bias Current  | mA   | ±10%     |
| Tx Optical Power | dB   | ±3       |
| Rx Optical Power | dB   | ±3       |

VIII.Recommended Interface Circuit

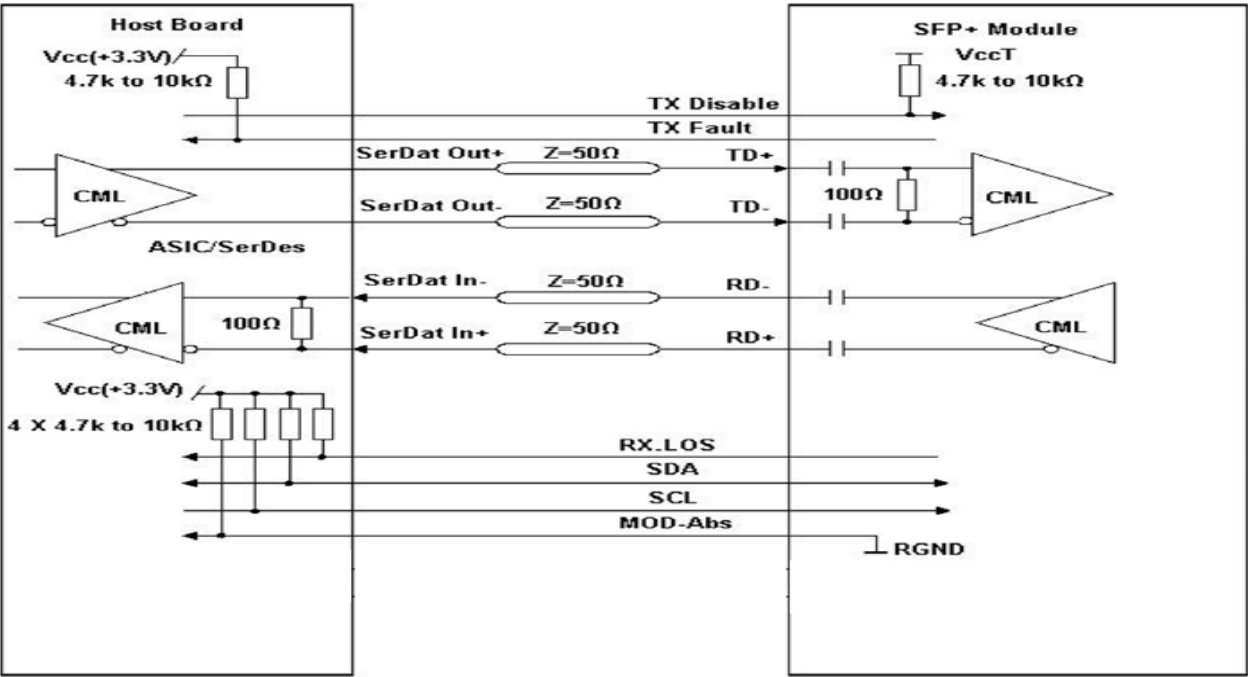

IX. Mechanical Dimensions

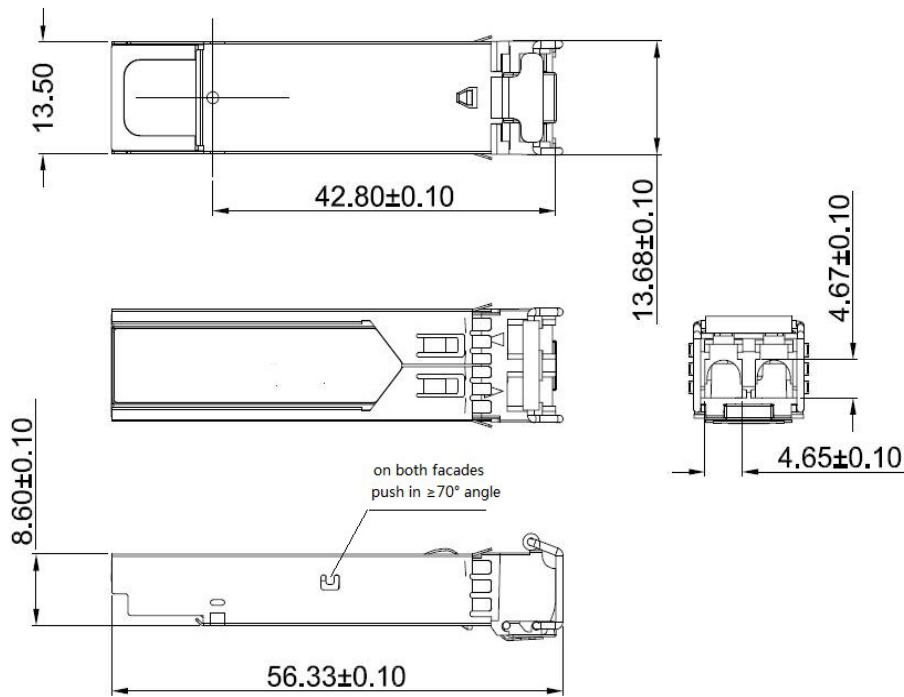

SFP wire mechanical drawing (Unit: mm)