

## LPHKL23(32)-K40C(I)

SFP+ 10Gb/s T12/R13(T13/R12) 40km DDMI

### PRODUCT FEATURES

- Up to 11.3Gbps Data Links
- 1270nm DFB /1330 DFB laser transmitter and PIN/TIA receiver
- Maximum link length of 40km on 9/125um SMF
- Hot-pluggable SFP+ footprint
- LC receptacles
- Low power dissipation
- RoHS compliant and lead-free
- Support Digital Diagnostic Monitor interface
- Single +3.3V power supply
- Compliant with SFF-8472
- Case operating temperature



Commercial: 0°C to +70°C

Industrial: -40°C to +85°C

### APPLICATIONS

- 10GBASE-ER/EW 10G Ethernet
- 8G/10G Fibre Channel
- CPRI option 7A, option 8
- Other Optical Links


### Compliance

- SFP MSA
- SFF-8472
- IEEE802.3ae
- ROHS

## Ordering information

Part No.	Bit Rate (Gbps)	Laser (nm)	Distance (km)	Fiber Type	DDMI	Connector	Temp
LPHKL23-K40C	10.3125	1270	40	SMF	YES	LC	0°C~70°C
LPHKL23-K40I	10.3125	1270	40	SMF	YES	LC	-40°C~85°C
LPHKL32-K40C	10.3125	1330	40	SMF	YES	LC	0°C~70°C
LPHKL32-K40I	10.3125	1330	40	SMF	YES	LC	-40°C~85°C

## I. Pin Diagram

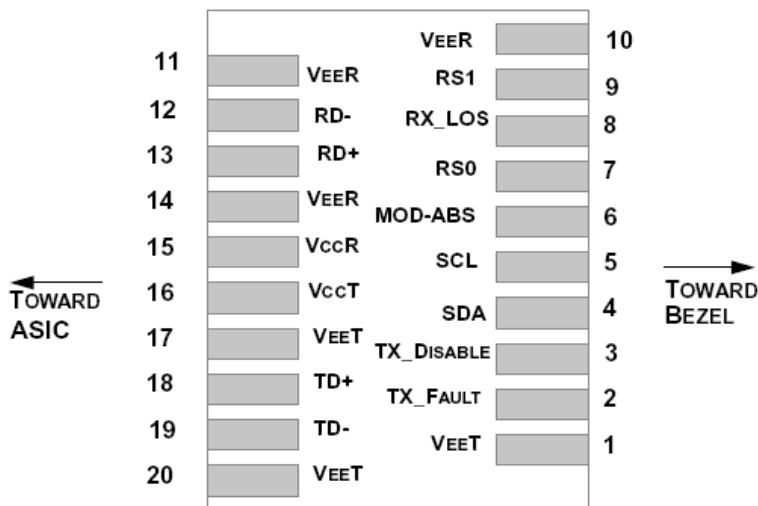

Pinout of Connector Block on Host Board

## II. Pin Descriptions

Pin	Symbol	Name/Description	Ref.
1	V <sub>EET</sub>	Transmitter Ground (Common with Receiver Ground)	1
2	T <sub>FAULT</sub>	Transmitter Fault.	2
3	T <sub>DIS</sub>	Transmitter Disable. Laser output disabled on high or open.	3
4	SDA	2-wire Serial Interface Data Line	4
5	SCL	2-wire Serial Interface Clock Line	4
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	No connection required	
8	LOS	Loss of Signal indication. Logic "0" indicates normal operation.	5
9	RS1	No connection required	
10	V <sub>EER</sub>	Receiver Ground (Common with Transmitter Ground)	1
11	V <sub>EER</sub>	Receiver Ground (Common with Transmitter Ground)	1

12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	$V_{EER}$	Receiver Ground (Common with Transmitter Ground)	1
15	$V_{CCR}$	Receiver Power Supply	
16	$V_{CCT}$	Transmitter Power Supply	
17	$V_{EET}$	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	$V_{EET}$	Transmitter Ground (Common with Receiver Ground)	1

#### Notes:

1. Circuit ground is internally isolated from chassis ground.
2.  $T_{FAULT}$  is an open collector/drain output, which is pulled up with a  $4.7\text{k}\Omega - 10\text{k}\Omega$  resistor on the host board, but is grounded inside the SFP+ cable plug.
3. Laser output disabled on  $T_{DIS} > 2.0\text{V}$  or open, enabled on  $T_{DIS} < 0.8\text{V}$ .
4. Should be pulled up with  $4.7\text{k}\Omega - 10\text{k}\Omega$  on host board to a voltage between  $2.0\text{V}$  and  $3.6\text{V}$ . MOD\_ABS pull line low to indicate module is plugged in.
5. LOS is open collector output. Should be pulled up with  $4.7\text{k}\Omega - 10\text{k}\Omega$  on host board to a voltage between  $2.0\text{V}$  and  $3.6\text{V}$ . Logic 0 indicates normal operation; logic 1 indicates loss of signal.

### III. Absolute Maximum Ratings

Parameter	Symbol	Min	Type	Max	Unit	Ref.
Maximum Supply Voltage	Vcc	-0.5		3.6	V	
Storage Temperature	TS	-40		85	°C	
Case Operating Temperature	TOP	0		70	°C	Commercial
		-40		85		Industrial
Relative Humidity	RH	5		95	%	1

Notes1: Non-condensing.

### IV. Optical Characteristics ( $\text{TOP} = 0^\circ\text{C}$ to $70^\circ\text{C}$ , $\text{VCC} = 3.3 \pm 5\%$ Volts)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
<b>Transmitter</b>						
Center Wavelength	$\lambda_c$	1260	1270	1280	nm	ESHKLB23-K40
		1320	1330	1340		ESHKLB32-K40
Spectral Width(-20dB)	Pm			1	nm	
Side-mode Suppression Ratio	SMSR	30			dB	

Average Output Power	Pavg	0		5	dBm	
Extinction Ratio	ER	3.5			dB	
Return Loss		12			dB	
Transmitter OFF Output Power	POff			-30	dBm	
<b>Receiver</b>						
Center Wavelength	$\lambda_c$	1320	1330	1340	nm	ESHKLB23-K40
		1260	1270	1280		ESHKLB32-K40
Receiver Sensitivity, Average Power				-15	dBm	1
Receiver Saturation Power	Psat			0.5	dBm	
Loss of Signal Assert	$P_A$	-30			dBm	
Loss of Signal De-assert	$P_D$			-17	dBm	
LOS Hysteresis	$P_D - P_A$	0.5			dB	

Notes1. Measured with a PRBS 2^31-1 test pattern, @10.3125Gb/s, BER<1E-12


## V. Electrical Characteristics (TOP = 0°C to 70°C, VCC = 3.3 ± 5% Volts)

Parameter	Symbol	Min	Type	Max	Unit	Ref.
Supply Voltage	Vcc	3.135	3.3	3.465	V	
Supply Current	Icc			300	mA	
<b>Transmitter</b>						
Input differential impedance	Rin		100			1
Differential data input swing	Vin, pp	200		1000	mV	
Transmit Disable Voltage	$V_D$	2		$V_{cc}$	V	
Transmit Enable Voltage	$V_{EN}$	$V_{ee}$		$V_{ee}+0.8$	V	
<b>Receiver</b>						
Differential data output swing	Vout, pp	200		1000	mV	2
LOS Fault	$V_{LOS\_fault}$	2		$V_{cc}$	V	3
LOS Normal	$V_{LOS\_norm}$	$V_{ee}$		$V_{ee}+0.8$	V	3
Power Supply Noise Tolerance	$V_{CCT}/V_{CCR}$	Per SFF-8431			mVpp	

### Notes:

1. Connected directly to TX data input pins.AC coupling from pins into laser driver IC.
2. Into 100Ω differential termination.
3. Loss Of Signal is LVTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.


## I. Digital Diagnostic Memory Map

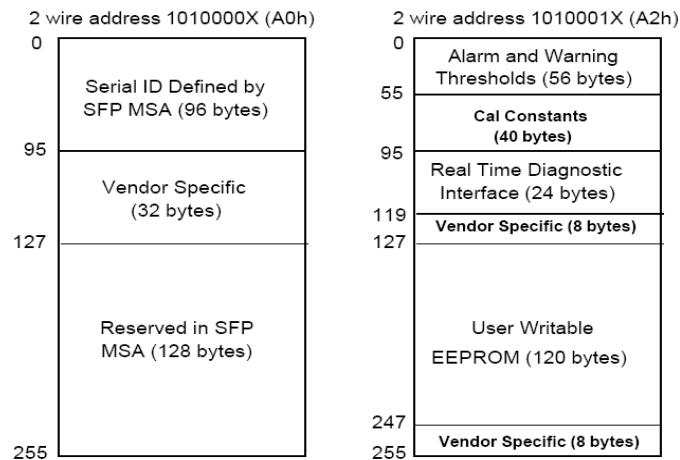

## II. Digital Diagnostic Monitoring Information

Parameter	Unit	Accuracy
Case Temperature	°C	±3
Supply Voltage	V	±3%
Tx Bias Current	mA	±10%
Tx Optical Power	dB	±3
Rx Optical Power	dB	±3

## III. Recommended Interface Circuit

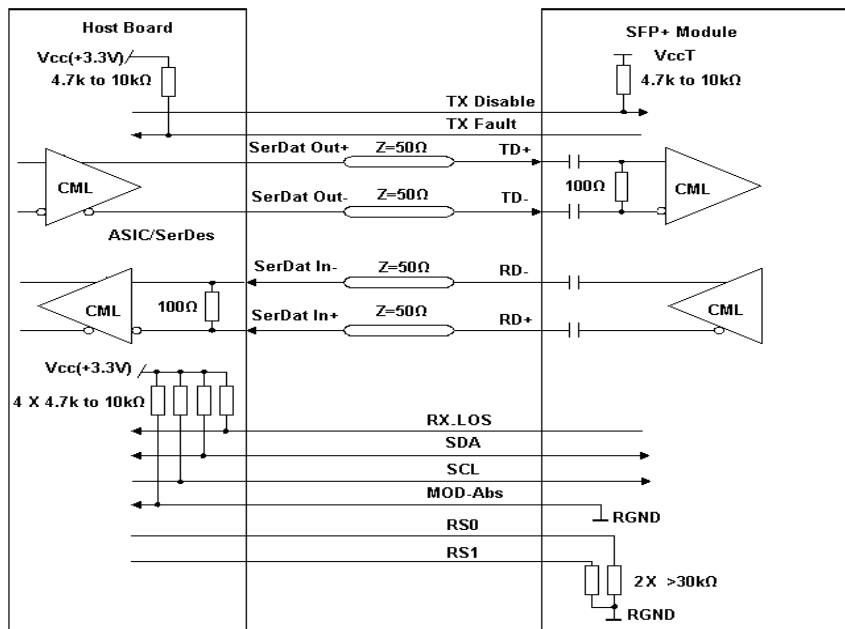

## IV. Mechanical Dimensions

