

## LPGCLM85-S55C(I)

SFP 1.25Gb/s 850nm 550m DDMI

### PRODUCT FEATURES

- Up to 1.25Gbps Data Links
- 850nm VCSEL laser transmitter and PIN/TIA receiver
- Maximum link length of 550m on 50/125um MMF
- Hot-pluggable SFP footprint
- Duplex LC receptacles
- Low power dissipation
- RoHS compliant and lead-free
- Support Digital Diagnostic Monitor interface
- Single +3.3V power supply
- Compliant with SFF-8472
- Case operating temperature



Commercial: 0°C to +70°C

Industrial: -40°C to +85°C

### APPLICATIONS

- 1000BASE-SX Ethernet
- 1.06Gb/s Fibre Channel


### Compliance

- SFP MSA
- SFF-8472
- IEEE802.3z
- ROHS

## Ordering information

Part No.	Bit Rate (Gbps)	Laser (nm)	Distance (m)	Fiber Type	DDMI	Connector	Temp
LPGCLM85-S55C	1.25	850	550	MMF	YES	LC	0°C~70°C
LPGCLM85-S55I	1.25	850	550	MMF	YES	LC	-40°C~85°C

## I. Pin Diagram

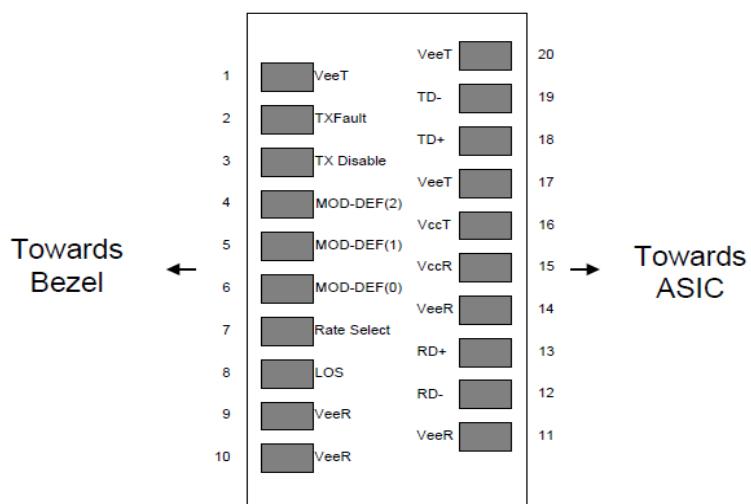

Pinout of Connector Block on Host Board

## II. Pin Descriptions

Pin	Symbol	Name/Description	Ref.
1	$V_{EET}$	Transmitter Ground (Common with Receiver Ground)	1
2	$T_{FAULT}$	Transmitter Fault.	2
3	$T_{DIS}$	Transmitter Disable. Laser output disabled on high or open.	3
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	4
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	4
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	4
7	Rate Select	No connection required	
8	LOS	Loss of Signal indication. Logic "0" indicates normal operation.	5
9	$V_{EER}$	Receiver Ground (Common with Transmitter Ground)	

10	$V_{EER}$	Receiver Ground (Common with Transmitter Ground)	1
11	$V_{EER}$	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out (CML). AC Coupled	
13	RD+	Receiver Non-inverted DATA out (CML). AC Coupled	
14	$V_{EER}$	Receiver Ground (Common with Transmitter Ground)	1
15	$V_{CCR}$	Receiver Power Supply	
16	$V_{CCT}$	Transmitter Power Supply	
17	$V_{EET}$	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	$V_{EET}$	Transmitter Ground (Common with Receiver Ground)	1

#### Notes:

1. Circuit ground is internally isolated from chassis ground.
2.  $T_{FAULT}$  is an open collector/drain output, which is pulled up with a  $4.7\text{k}\Omega - 10\text{k}\Omega$  resistor on the host board, but is grounded inside the SFP cable plug.
3. Laser output disabled on  $T_{DIS} > 2.0\text{V}$  or open, enabled on  $T_{DIS} < 0.8\text{V}$ .
4. Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a  $4.7\text{K} - 10\text{K}\Omega$  resistor on the host board. The pull-up voltage shall be  $V_{CCT}$  or  $V_{CCR}$   
Mod-Def 0 is grounded by the module to indicate that the module is present  
Mod-Def 1 is the clock line of two wire serial interface for serial ID  
Mod-Def 2 is the data line of two wire serial interface for serial ID
5. LOS is open collector output. Should be pulled up with  $4.7\text{k}\Omega - 10\text{k}\Omega$  on host board to a voltage between  $2.0\text{V}$  and  $3.6\text{V}$ . Logic 0 indicates normal operation; logic 1 indicates loss of signal.

### III. Absolute Maximum Ratings

Parameter	Symbol	Min	Type	Max	Unit	Ref.
Maximum Supply Voltage	$V_{CC}$	-0.5		3.6	V	
Storage Temperature	$T_{S}$	-40		85	°C	
Case Operating Temperature	$T_{OP}$	0		70	°C	Commercial
		-40		85		Industrial
Relative Humidity	$RH$	0		85	%	1

Notes:

1. Non-condensing.

## IV. Optical Characteristics (TOP = 0°C to 70°C, VCC = 3.3 ± 5% Volts)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
<b>Transmitter</b>						
Center Wavelength	$\lambda_c$	840	850	860	nm	
RMS Spectral Width	$P_m$			0.85	nm	
Average Output Power	$P_{avg}$	-9		-3	dBm	
Extinction Ratio	$ER$	9			dB	
Return Loss		12			dB	
Transmitter OFF Output Power	$P_{Off}$			-30	dBm	
<b>Receiver</b>						
Center Wavelength	$\lambda_c$	840		860	nm	
Receiver Sensitivity, Average Power				-17	dBm	
Receiver Saturation Power	$P_{sat}$			0	dBm	
Loss of Signal Assert	$P_A$	-35			dBm	
Loss of Signal De-assert	$P_D$			-18	dBm	
LOS Hysteresis	$P_D - P_A$	0.5			dB	

## V. Electrical Characteristics (TOP = 0°C to 70°C, VCC = 3.3 ± 5% Volts)


Parameter	Symbol	Min	Type	Max	Unit	Ref.
Supply Voltage	$V_{cc}$	3.135	3.3	3.465	V	
Supply Current	$I_{cc}$			300	mA	
<b>Transmitter</b>						
Input differential impedance	$R_{in}$		100			1
Differential data input swing	$V_{in, pp}$	200		1000	mV	
Transmit Disable Voltage	$V_D$	2		$V_{cc}$	V	
Transmit Enable Voltage	$V_{EN}$	$V_{ee}$		$V_{ee}+0.8$	V	
<b>Receiver</b>						
Differential data output swing	$V_{out, pp}$	200		1000	mV	2

LOS Fault	V <sub>LOS_fault</sub>	2		Vcc	V	3
LOS Normal	V <sub>LOS_norm</sub>	Vee		Vee+0.8	V	3
Power Supply Noise Tolerance	V <sub>CCT/V<sub>CCR</sub></sub>	Per SFF-8431 Rev 4.1			mVpp	4

Notes:

1. Connected directly to TX data input pins.AC coupling from pins into laser driver IC.
2. Into 100Ω differential termination.
3. Loss Of Signal is LVTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.


## VI. Digital Diagnostic Memory Map

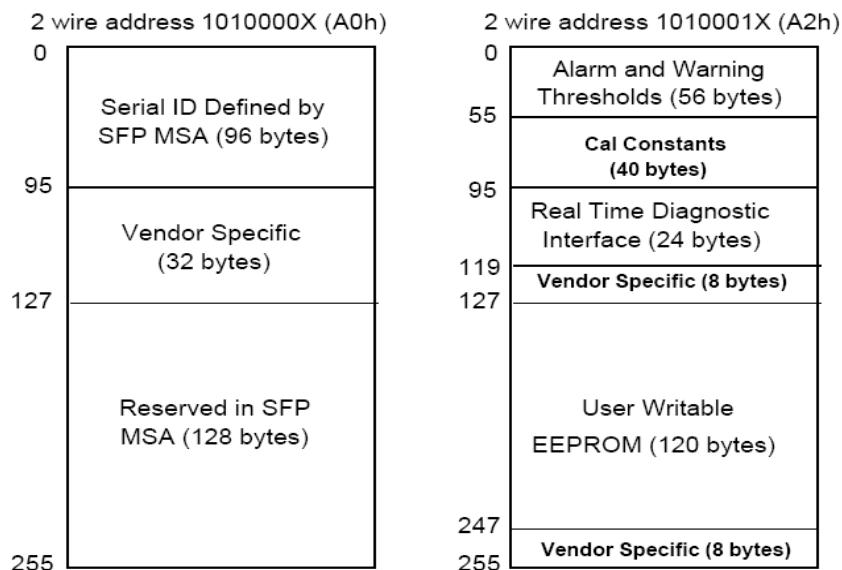


## VII. Digital Diagnostic Monitoring Information

Parameter	Unit	Accuracy
Case Temperature	°C	±3
Supply Voltage	V	±3%
Tx Bias Current	mA	±10%
Tx Optical Power	dB	±3
Rx Optical Power	dB	±3

## VIII. Recommended Interface Circuit

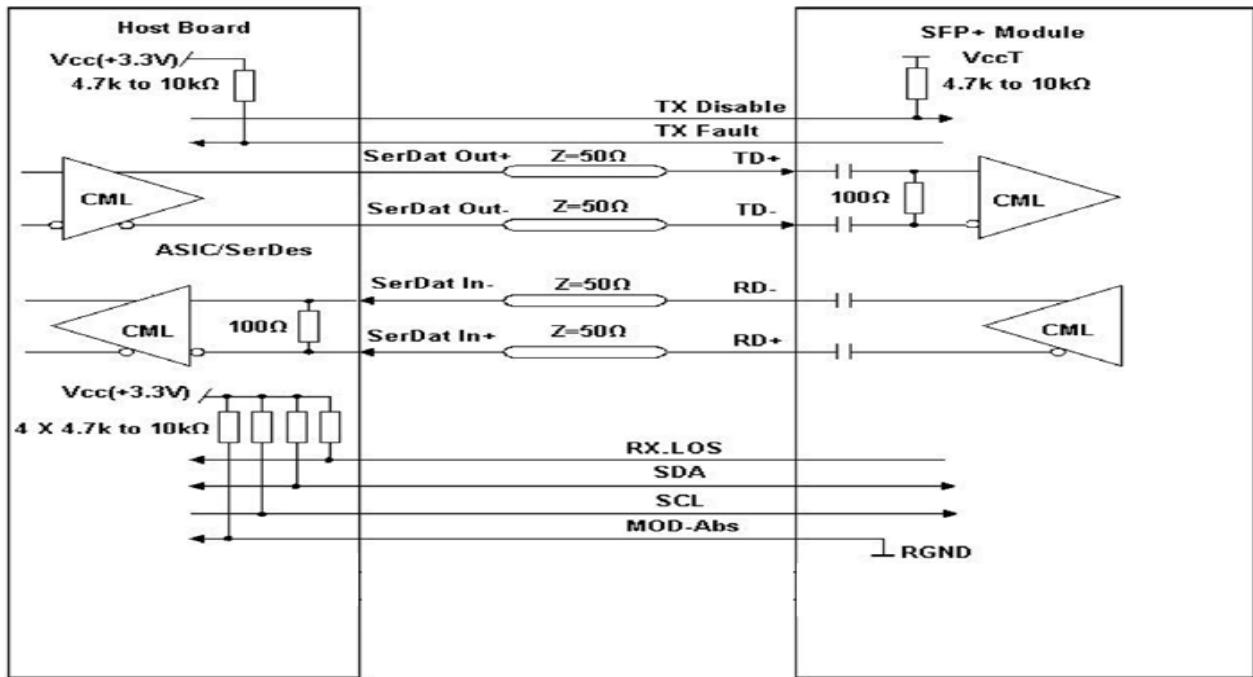

## IX. Mechanical Dimensions

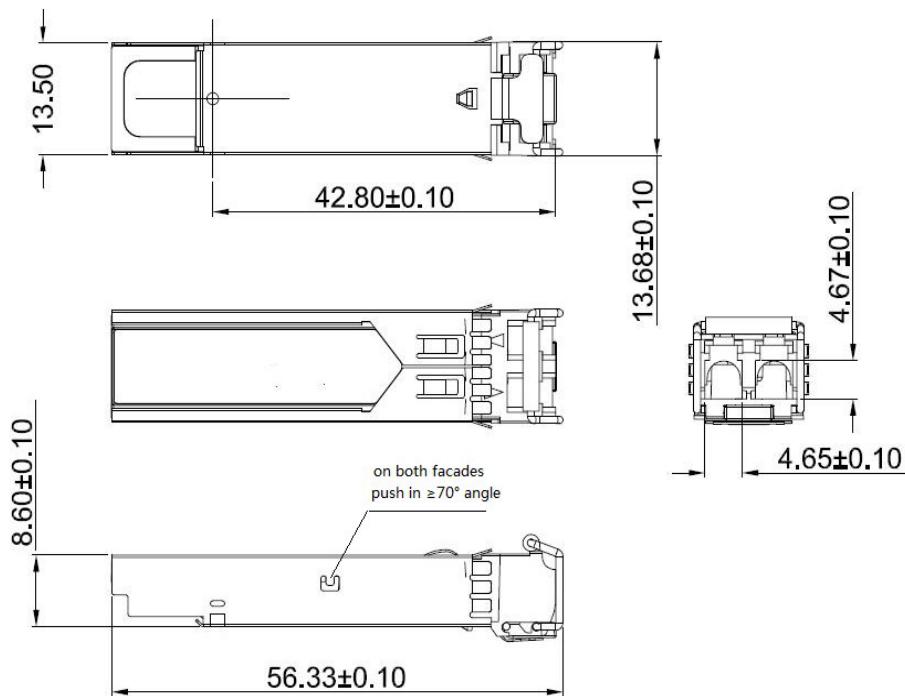

SFP wire mechanical drawing (Unit: mm)